


Air Brake Push-In - Fittings

RAUFOSS

P5 PLUG-IN SYSTEM INTRODUCTION

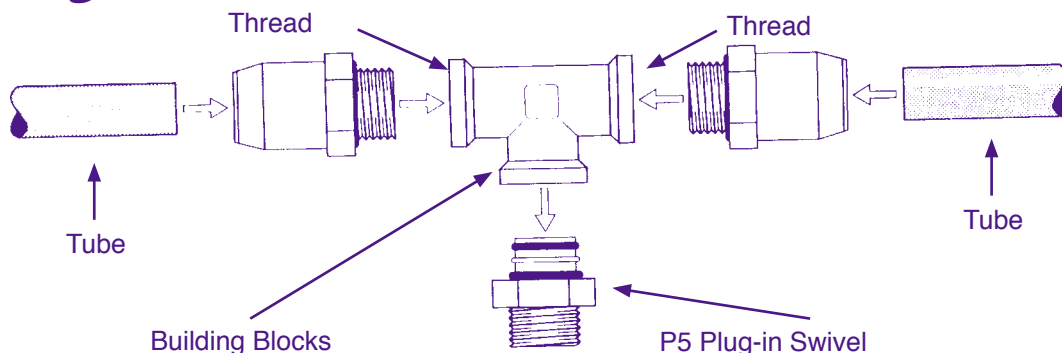

The main benefits of the Raufoss P5 Swivel System are:

Ease of assembly - can be quickly put together by simply pushing the P5 swivel into its appropriate matching part i.e. P5 Elbows and P5 Tee Pieces

Once fitted it is easy to turn the fittings whichever way the tubing needs to be directed.

Two snap rings give added security when assembled. Once the first ring engages the fittings will not disengage. When the second ring engages the fitting is then completely secure and gives an airtight seal.

Male Metric threads have EPDM "O" rings on scaling surfaces which provide excellent seals and are designed to fit all valve manufacturer's ports.

Operating temperature of between - 40C to 100C.

The Swivel assemblies can be unscrewed from the valves etc. without the need for the tubing to be taken out of the fittings thus retaining an airtight seal.

Male threads range from M10 to M22 and are also available in 1/8", 1/4", 3/8", 1/2" NPTF.

P5 Swivel Elbows & Tees with M16 female threads allow for a large range of M16 male connectors to be fitted.

Time saving, fewer parts to stock and no need for special assembly tools.

MSK460 - Maxi-Stor Box

Contains all popular Raufoss P5 components
Ask our sales team for contents
and prices

Phone: 01474 321954 Fax: 01474 321988